

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
23 September 2004 (23.09.2004)

PCT

(10) International Publication Number
WO 2004/080542 A1

(51) International Patent Classification⁷: **A62C 37/08**

420-858 (KR). **HATTORI, Tadashi** [JP/JP]; Clover Heights Kinwada Beureru 607, 242-5, Gakuhara-Cho, Osaka 596-0822 (JP).

(21) International Application Number:
PCT/KR2004/000492

(22) International Filing Date: 10 March 2004 (10.03.2004)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
10-2003-0014696 10 March 2003 (10.03.2003) KR
2003-337223 29 September 2003 (29.09.2003) JP
10-2003-0071825 15 October 2003 (15.10.2003) KR
10-2004-0015932 9 March 2004 (09.03.2004) KR

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SHIM, Dae-Min** [KR/KR]; Hyundai Apt. 203-703, 654, Gaepo-Dong, Gangnam-Gu, Seoul 135-240 (KR).


(74) Agent: **PARK, Jang-Won**; Jewoo Bldg. 5th Floor, 200, Nonhyun-Dong, Gangnam-Gu, Seoul 135-010 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicants (for all designated States except US): **PARADISE INDUSTRY CO. LTD.** [KR/KR]; 65-2, Chunui-Dong, Wonmi-Gu, Bucheon, Gyeonggi-Do

[Continued on next page]

(54) Title: **SPRINKLER HEAD**

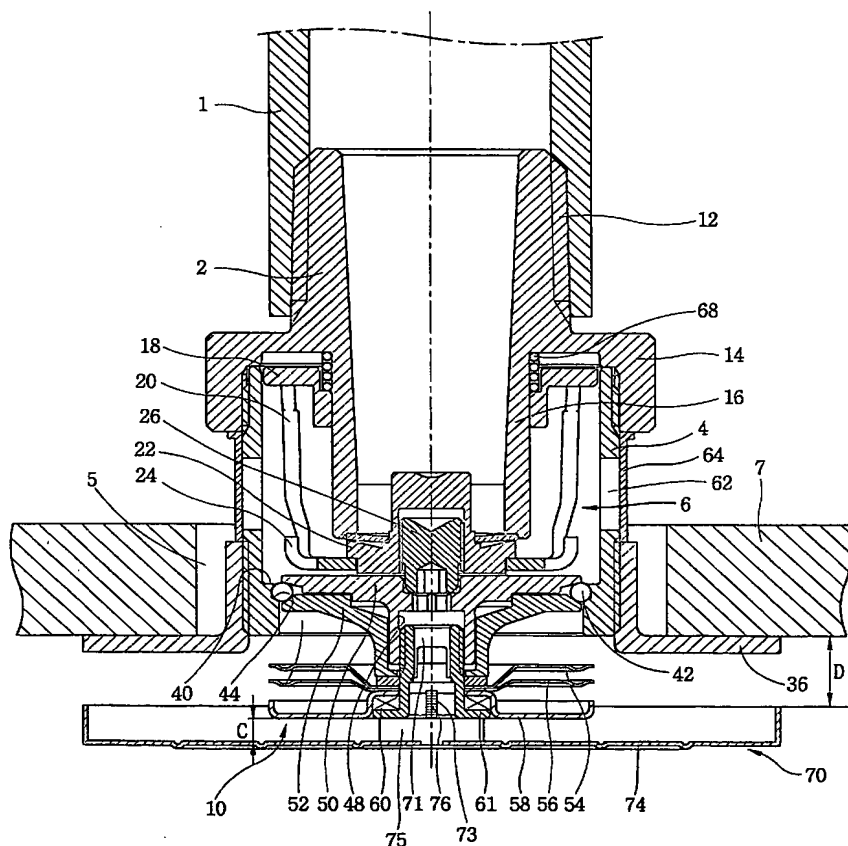

(57) Abstract: A sprinkler head comprises: a locking unit locked inside a second housing for maintaining a sealing state between a deflector and a first housing; a heat responding unit exposed to outside of a ceiling for releasing the locked state of the locking unit by reacting to fire when fire breaks out; and a head cover mounted at a lower side of the heat responding unit and transmitting heat to the heat responding unit after collecting heat at the time of a fire occurrence. According to this, a fine appearance of the sprinkler head is provided, and the head cover performs a heat collecting function at the time of a fire occurrence thus to have a fast reaction speed, thereby enhancing a function of the sprinkler head.